




## Drill Bits

**Application:** hammer drilling in concrete, masonry, natural stone

- Fully ground
- Straight shank
- Body of high quality carbon steel C45
- Aggressive Tungsten-carbide tip
- Tip material YG8-C, tip angle 130°
- High quality nickel plating
- Increased flute groove
- Spiral type- N
- Standard DIN 8039

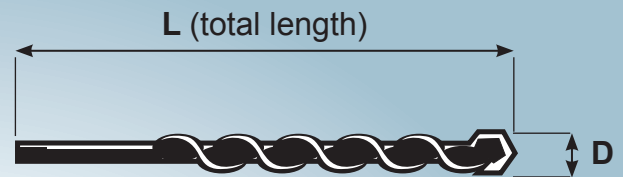

Cat. №	Diameter (D), mm	Total length (L), mm	Pcs/Pack
<b>Standard version:</b>			
20009200000	4	75	1
20009200600	5	85	1
20009200100	6	100	1
20009200200	8	120	1
20009200300	10	120	1
20009200400	12	150	1
20009200500	14	150	1
20009204100	16	150	1
<b>Long version:</b>			
20009200700	5	150	1
20009200800	6	200	1
20009200900	8	200	1
20009201000	10	200	1
20009201100	12	250	1
20009203100	6	400	1
20009203200	8	400	1
20009203300	10	400	1
20009203400	12	400	1
20009203500	14	400	1
20009203600	16	400	1
<b>HEX shank:</b>			
20009780000	4	75	1
20009780100	5	85	1
20009780200	6	100	1
20009780300	8	120	1
20009780400	10	120	1
20009780500	12	150	1
<b>Pro Series with black finish:</b>			
20009203700	8	120	1
20009203800	10	120	1
20009203900	12	150	1
20009204000	14	150	1

**SPARKY Power Tools GmbH**  
 20, Leipziger Strasse  
 10117 Berlin, Germany  
 Tel.: +49 30 203916-0  
 Fax: +49 30 203916-66  
 E-mail: [powertools@sparkygroup.com](mailto:powertools@sparkygroup.com)